


Perskoppelingen X serie


3



BSP	AGR	BSP Buitendraad											
		Slangmaat			Draad	Afmetingen (mm)					Max W.P.		
		DN	Size	Inch	F	H	L	S			bar	PSI	
	X02BM03	5	03	3/16"	1/8"-28	20	45	14				415	6000
	X04BM03	5	03	3/16"	1/4"-19	24	49	19				415	6000
	X02BM04	6	04	1/4"	1/8"-28	20	48	14				415	6000
	X04BM04	6	04	1/4"	1/4"-19	25	53	19				450	6500
	X06BM04	6	04	1/4"	3/8"-19	27	55	22				450	6500
	X08BM04	6	04	1/4"	1/2"-14	32	60	27				450	6500
	X04BM05	8	05	5/16"	1/4"-19	25	53	19				350	5000
	X06BM05	8	05	5/16"	3/8"-19	27	55	22				350	5000
	X08BM05	8	05	5/16"	1/2"-14	32	60	27				350	5000
	X04BM06	10	06	3/8"	1/4"-19	25	55	19				450	6500
	X06BM06	10	06	3/8"	3/8"-19	27	58	22				450	6500
	X08BM06	10	06	3/8"	1/2"-14	32	62	27				450	6500
	X06BM08	12	08	1/2"	3/8"-19	28	61	22				415	6000
	X08BM08	12	08	1/2"	1/2"-14	33	66	27				415	6000
	X10BM08	12	08	1/2"	5/8"-14	35	68	30				415	6000
	X12BM08	12	08	1/2"	3/4"-14	36	69	32				415	6000
	X08BM10	16	10	5/8"	1/2"-14	33	69	27				350	5000
	X10BM10	16	10	5/8"	5/8"-14	35	71	30				350	5000
	X12BM10	16	10	5/8"	3/4"-14	36	72	32				350	5000
	X08BM12	20	12	3/4"	1/2"-14	34	74	27				350	5000
oa	X10BM12	20	12	3/4"	5/8"-14	36	76	30				350	5000
	X12BM12	20	12	3/4"	3/4"-14	37	77	32				350	5000
	X16BM12	20	12	3/4"	1"-11	42	82	41				350	5000
	X12BM16	25	16	1"	3/4"-14	38	89	32				280	4000
	X16BM16	25	16	1"	1"-11	43	94	41				280	4000
	X20BM16	25	16	1"	1 1/4"-11	46	97	50				280	4000
	X20BM20	32	20	1 1/4"	1 1/4"-11	47	105	50				210	3000
	X24BM20	32	20	1 1/4"	1 1/2"-11	50	108	55				210	3000
	X24BM24	40	24	1 1/2"	1 1/2"-11	50	115	55				185	2700
oa	X32BM24	40	24	1 1/2"	2"-11	55	119	70				185	2700
	X32BM32	50	32	2"	2"-11	56	126	70				165	2400


Perskoppelingen X serie

BSPT	AGR-K	BSPT buitendraad											
		GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)					Max W.P.	
			DN	Size	Inch	F	H	L	S		bar	PSI	
oa	X02BMT03	5	03	3/16"	1/8"-28	20	45	12				415	6000
	X04BMT03	5	03	3/16"	1/4"-19	25	50	15				415	6000
	X02BMT04	6	04	1/4"	1/8"-28	21	49	12				450	6500
	X04BMT04	6	04	1/4"	1/4"-19	25	53	15				450	6500
	X06BMT04	6	04	1/4"	3/8"-19	26	54	19				450	6500
	X04BMT05	8	05	5/16"	1/4"-19	25	53	15				350	5000
	X06BMT05	8	05	5/16"	3/8"-19	26	54	19				350	5000
	X04BMT06	10	06	3/8"	1/4"-19	26	56	15				450	6500
	X06BMT06	10	06	3/8"	3/8"-19	27	57	19				450	6500
	X08BMT06	10	06	3/8"	1/2"-14	32	63	22				415	6000
	X06BMT08	12	08	1/2"	3/8"-19	28	64	19				415	6000
	X08BMT08	12	08	1/2"	1/2"-14	33	66	22				415	6000
	X08BMT10	16	10	5/8"	1/2"-14	33	69	22				350	5000
	X12BMT10	16	10	5/8"	3/4"-14	35	71	27				350	5000
	X12BMT12	20	12	3/4"	3/4"-14	36	77	27				350	5000
	X16BMT12	20	12	3/4"	1"-11	41	82	36				280	4000
	X16BMT16	25	16	1"	1"-11	43	94	36				280	4000
	X20BMT16	25	16	1"	1 1/4"-11	47	98	46				210	3000
	X20BMT20	32	20	1 1/4"	1 1/4"-11	48	106	46				210	3000
	X24BMT24	40	24	1 1/2"	1 1/2"-11	49	114	50				185	2700
X32BMT32	50	32	2"	2"-11	57	127	65				165	2400	



Perskoppelingen X serie

3




BSP wartel	DKR	BSP wartel												
		Slangmaat			Draad	moer	Afmetingen (mm)					Max W.P.		
		DN	Size	Inch	F		H	L	S			bar	PSI	
X02BF03		5	03	3/16"	1/8"-28	P	16	41	14				415	6000
X04BF03		5	03	3/16"	1/4"-19	P	19	44	19				415	6000
X02BF04		6	04	1/4"	1/8"-28	P	17	45	14				415	6000
X04BF04		6	04	1/4"	1/4"-19	P	19	47	19				450	6500
X06BF04		6	04	1/4"	3/8"-19	P	22	50	22				450	6500
X08BF04		6	04	1/4"	1/2"-14	P	23	51	27				450	6500
X04BF05		8	05	5/16"	1/4"-19	P	19	47	19				350	5000
X06BF05		8	05	5/16"	3/8"-19	P	22	50	22				350	5000
X08BF05		8	05	5/16"	1/2"-14	P	23	51	27				350	5000
X04BF06		10	06	3/8"	1/4"-19	P	19	49	19				450	6500
X06BF06		10	06	3/8"	3/8"-19	P	21	51	22				450	6500
X08BF06		10	06	3/8"	1/2"-14	P	23	54	27				450	6500
X06BF08		12	08	1/2"	3/8"-19	P	22	56	22				415	6000
X08BF08		12	08	1/2"	1/2"-14	P	23	56	27				415	6000
X10BF08		12	08	1/2"	5/8"-14	P	24	57	30				415	6000
X12BF08		12	08	1/2"	3/4"-14	P	27	60	32				415	6000
X08BF10		16	10	5/8"	1/2"-14	P	23	59	27				350	5000
X10BF10		16	10	5/8"	5/8"-14	P	23	59	30				350	5000
X12BF10		16	10	5/8"	3/4"-14	P	27	63	32				350	5000
X08BF12		20	12	3/4"	1/2"-14	P	24	65	27				350	5000
X10BM12		20	12	3/4"	5/8"-14	P	24	64	30				350	5000
X12BF12		20	12	3/4"	3/4"-14	P	27	67	32				350	5000
X16BF12		20	12	3/4"	1"-11	P	30	70	41				350	5000
X12BF16		25	16	1"	3/4"-14	P	28	79	32				280	4000
X16BF16		25	16	1"	1"-11	P	30	81	41				280	4000
X20BF16		25	16	1"	1 1/4"-11	P	35	86	50				280	4000
X20BF20		32	20	1 1/4"	1 1/4"-11	P	34	92	50				210	3000
X24BF20		32	20	1 1/4"	1 1/2"-11	P	36	93	55				210	3000
X24BF24		40	24	1 1/2"	1 1/2"-11	P	34	99	55				185	2700
X32BF24		40	24	1 1/2"	2"-11	P	39	103	70				185	2700
X32BF32		50	32	2"	2"-11	P	37	107	70				165	2400

P - gekrompen moer

Perskoppelingen X serie

BSP vlak		DKR <small>FLAT SEAT</small>			BSP wartel vlakdichtend							
GSS Artikel nr	Slangmaat			Draad	moer	Afmetingen (mm)					Max W.P.	
	DN	Size	Inch	F		H	L	S			bar	PSI
X04FF04	6	04	1/4"	1/4"-19	P	15	43	19				
X06FF04	6	04	1/4"	3/8"-19	P	18	46	22				
X06FF05	8	05	5/16"	3/8"-19	P	18	46	22				
X06FF06	10	06	3/8"	3/8"-19	P	17	47	22				
X08FF06	10	06	3/8"	1/2"-14	P	19	49	27				
X08FF08	12	08	1/2"	1/2"-14	P	19	52	27				
X10FF08	12	08	1/2"	5/8"-14	P	21	54	30				
X12FF08	12	08	1/2"	3/4"-14	P	23	56	32				
X10FF10	16	10	5/8"	5/8"-14	P	20	56	30				
X12FF10	16	10	5/8"	3/4"-14	P	23	59	32				
X12FF12	20	12	3/4"	3/4"-14	P	22	63	32				
X16FF12	20	12	3/4"	1"-11	P	25	65	41				
X16FF16	25	16	1"	1"-11	P	25	76	41				
X20FF20	32	20	1 1/4"	1 1/4"-11	P	28	90	50				



P - gekrompen moer

oa


oa

3

Perskoppelingen X serie

3

BSP wartel 45"	DKR45	BSP wartel 45"											
		GSS Artikel nr	Slangmaat			Draad	moer	Afmetingen (mm)				Max W.P.	
			DN	Size	Inch	F		H	L	K	S	bar	PSI
	X02BF45S03	5	03	3/16"	1/8"-28	P	33	58	14	14		415	6000
	X04BF45S03	5	03	3/16"	1/4"-19	P	35	60	16	19		415	6000
	X02BF45S04	6	04	1/4"	1/8"-28	P	36	64	16	14		415	6000
	X04BF45S04	6	04	1/4"	1/4"-19	P	37	65	16	19		450	6500
	X06BF45S04	6	04	1/4"	3/8"-19	P	40	68	19	22		450	6500
	X08BF45S04	6	04	1/4"	1/2"-14	P	42	70	21	27		450	6500
	X04BF45S05	8	05	5/16"	1/4"-19	P	39	67	18	19		350	5000
	X06BF45S05	8	05	5/16"	3/8"-19	P	41	69	19	22		350	5000
	X08BF45S05	8	05	5/16"	1/2"-14	P	43	71	21	27		350	5000
	X04BF45S06	10	06	3/8"	1/4"-19	P	41	72	18	19		450	6500
	X06BF45S06	10	06	3/8"	3/8"-19	P	42	73	19	22		450	6500
	X08BF45S06	10	06	3/8"	1/2"-14	P	44	75	21	27		450	6500
	X06BF45S08	12	08	1/2"	3/8"-19	P	49	82	22	22		415	6000
	X08BF45S08	12	08	1/2"	1/2"-14	P	49	82	22	27		415	6000
	X10BF45S08	12	08	1/2"	5/8"-14	P	49	82	22	30		415	6000
	X12BF45S08	12	08	1/2"	3/4"-14	P	53	86	26	32		415	6000
	X08BF45S10	16	10	5/8"	1/2"-14	P	57	93	26	27		350	5000
	X10BF45S10	16	10	5/8"	5/8"-14	P	54	90	24	30		350	5000
	X12BF45S10	16	10	5/8"	3/4"-14	P	57	93	26	32		350	5000
	X08BF45S12	20	12	3/4"	1/2"-14	P	68	108	30	27		350	5000
	X10BF45S12	20	12	3/4"	5/8"-14	P	66	106	28	30		350	5000
	X12BF45S12	20	12	3/4"	3/4"-14	P	66	106	28	32		350	5000
	X16BF45S12	20	12	3/4"	1"-11	P	68	108	30	41		350	5000
	X12BF45S16	25	16	1"	3/4"-14	P	87	138	38	32		280	4000
	X16BF45S16	25	16	1"	1"-11	P	84	135	36	41		280	4000
	X20BF45S16	25	16	1"	1 1/4"-11	P	85	136	37	50		280	4000
	X20BF45S20	32	20	1 1/4"	1 1/4"-11	P	100	157	43	50		210	3000
	X24BF45S20	32	20	1 1/4"	1 1/2"-11	P	100	157	43	55		210	3000
	X24BF45S24	40	24	1 1/2"	1 1/2"-11	P	116	180	49	55		185	2700
	X32BF45S24	40	24	1 1/2"	2"-11	P	116	180	49	70		185	2700
	X32BF45S32	50	32	2"	2"-11	P	150	220	62	70		165	2400

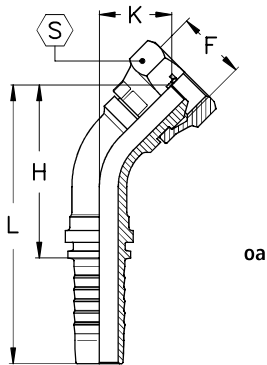


P - gekrompen moer

Perskoppelingen X serie

BSP wartel 90°

DKR90

BSP wartel 90°



GSS Artikel nr	Slangmaat			Draad	moer	Afmetingen (mm)				Max W.P.	
	DN	Size	Inch			F	H	L	K	S	bar
	X02BF90S03	5	03	3/16"	1/8"-28	P	21	46	23	14	415
X04BF90S03	5	03	3/16"	1/4"-19	P	21	46	26	19	415	6000
X02BF90S04	6	04	1/4"	1/8"-28	P	26	54	28	14	415	6000
X04BF90S04	6	04	1/4"	1/4"-19	P	26	54	28	19	450	6500
X06BF90S04	6	04	1/4"	3/8"-19	P	26	54	32	22	450	6500
X08BF90S04	6	04	1/4"	1/2"-14	P	26	54	36	27	450	6500
X04BF90S05	8	05	5/16"	1/4"-19	P	28	56	31	19	350	5000
X06BF90S05	8	05	5/16"	3/8"-19	P	28	56	34	22	350	5000
X08BF90S05	8	05	5/16"	1/2"-14	P	28	56	37	27	350	5000
X04BF90S06	10	06	3/8"	1/4"-19	P	31	61	34	19	450	6500
X06BF90S06	10	06	3/8"	3/8"-19	P	31	61	35	22	450	6500
X08BF90S06	10	06	3/8"	1/2"-14	P	31	61	38	27	450	6500
X06BF90S08	12	08	1/2"	3/8"-19	P	37	70	42	22	415	6000
X08BF90S08	12	08	1/2"	1/2"-14	P	37	70	42	27	415	6000
X10BF90S08	12	08	1/2"	5/8"-14	P	37	70	43	30	415	6000
X12BF90S08	12	08	1/2"	3/4"-14	P	37	70	48	32	415	6000
X08BF90S10	16	10	5/8"	1/2"-14	P	45	80	50	27	350	5000
X10BF90S10	16	10	5/8"	5/8"-14	P	45	80	46	30	350	5000
X12BF90S10	16	10	5/8"	3/4"-14	P	45	80	50	32	350	5000
X08BF90S12	20	12	3/4"	1/2"-14	P	54	95	59	27	350	5000
X10BF90S12	20	12	3/4"	5/8"-14	P	54	95	56	30	350	5000
X12BF90S12	20	12	3/4"	3/4"-14	P	54	95	56	32	350	5000
X16BF90S12	20	12	3/4"	1"-11	P	54	95	59	41	350	5000
X12BF90S16	25	16	1"	3/4"-14	P	70	121	75	32	280	4000
X16BF90S16	25	16	1"	1"-11	P	70	121	72	41	280	4000
X20BF90S16	25	16	1"	1 1/4"-11	P	70	121	73	50	280	4000
X20BF90S20	32	20	1 1/4"	1 1/4"-11	P	84	142	87	50	210	3000
X24BF90S20	32	20	1 1/4"	1 1/2"-11	P	84	142	87	55	210	3000
X24BF90S24	40	24	1 1/2"	1 1/2"-11	P	100	165	100	55	185	2700
X32BF90S24	40	24	1 1/2"	2"-11	P	100	165	100	70	185	2700
X32BF90S32	50	32	2"	2"-11	P	134	204	131	70	165	2400

P - gekrompen moer


3

Perskoppelingen X serie

BSP wartel 90°

DKR90 (COMPACT)

BSP wartel 90° compact



oa

P - gekrompen moer

GSS Artikel nr	Slangmaat			Draad	moer	Afmetingen (mm)				Max W.P.	
	DN	Size	Inch	F		H	L	K	S	bar	PSI
X04BF90K04	6	04	1/4"	1/4"-19	P	18	46	23	19	450	6500
X06BF90K05	8	05	5/16"	3/8"-19	P	21	49	26	22	450	6500
X06BF90K06	10	06	3/8"	3/8"-19	P	21	52	26	22	450	6500
X08BF90K08	12	08	1/2"	1/2"-14	P	24	57	28	27	415	6000
X12BF90K12	20	12	3/4"	3/4"-14	P	31	72	35	32	350	5000
X16BF90K16	25	16	1"	1"-11	P	38	89	41	41	280	4000

3